


project specification	D171 LED channel 1.75" x 1.75" or D116 - 1.75" - 1.75" round
fixture type	

Job Name:  
 Job Nbr:  
 Tag:  
 Distributor:  
 Electrician  
 Engineer:  
 Interior Design:  
 Architect:  
 note: site measurements required

Note:  
 Any Changes or modifications to mmj lighting 96 ltd lighting fixtures, must be done in the mmj lighting 96 ltd factory. Any modifications or changes done in the field will void all warranties and approvals.



LV led D199 - 1 lamp individual replaceable Module.

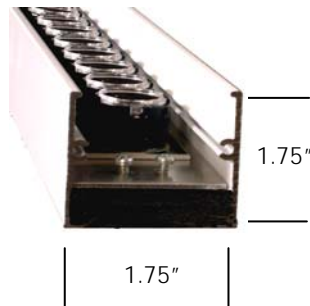

### D171 LED:

#### Extrusion:

D171 extrusion cw D171ec end caps. \_\_\_\_\_ overall length.  
 D171-IJ internal joiner [ use for runs longer than eight feet.]

### D171 LED mono-point:

D199LED-1 lamp 1 watt, 3 watt.  
 TRD \_\_\_\_\_ integral driver, overall length 6"  
 TRD-R \_\_\_\_\_ remote driver. overall length 3"  
 ETDC \_\_\_\_\_ remote DC Electronic transformer.

### D116-1.75 LED round:

D116 extrusion cw D116ec end cap \_\_\_\_\_ oal.

### LV LED:

D199LED - 1Lamp LED  
 \_\_\_\_\_ degree beam, L \_\_\_\_\_ Lens \_\_\_\_\_ degree beam

### Beam Lens:

BL 100 - 10 10° narrow spot lens.  
 BL 100 - 30 30° spot lens.  
 BL 100 - 45 45° narrow flood lens.  
 BL 100 - 15x30 15° x 30° elliptical beam lens.

### Finish:

white, black, natural, anodized \_\_\_\_\_.

### Accessories:

D171 arm bracket with back plate [pair] extends 6"  
 specify distance from surface  
 D171SK - suspension kit for pendant mounting  
 specify overall height: \_\_\_\_\_

### Power feed:


left, right

### Drivers:

TRD-INT \_\_\_\_\_ integral driver, TRD-R remote driver  
 Specify driver wattage: 20w120v, 40w120v, 60w120v

### Enclosure:

ETH100 enclosure for remote driver.

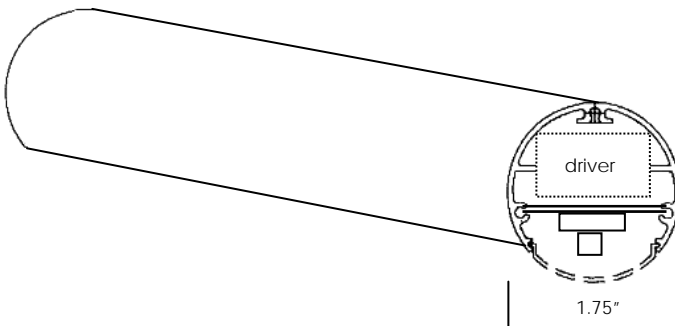

D171LED