


shop drawing

project specification D186® - ____' ____ watts per lamp, ____ watts per foot


fixture type LV Display™ cw LVT5 lamp illustrated in under cabinet and display applications

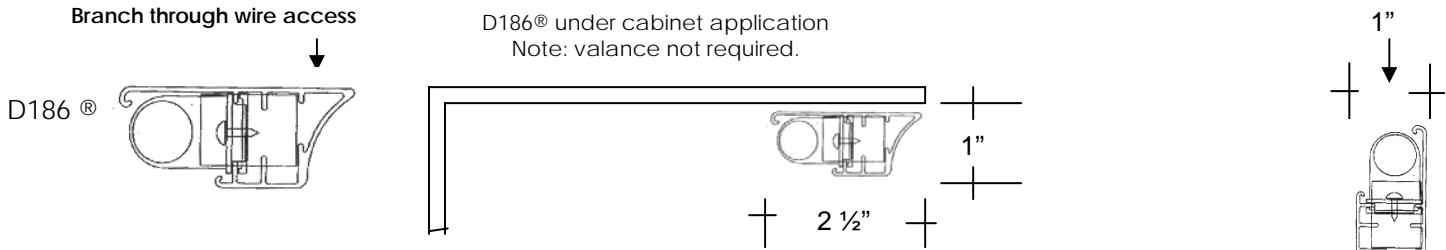

D186® under shelf mounting position
The D186® can be used to support glass or wooden shelves.

Integral electronic ballast:

Type 1 outdoor, minimum operating temperature -20 deg F, 30 deg C, maximum case temperature 158 deg F, 70 deg C. Ballast warranty 5 years from date of purchase. BALLAST WILL BE REPLACED AT A PRORATED VALUE DURING TIME OR WARRANTY PERIOD

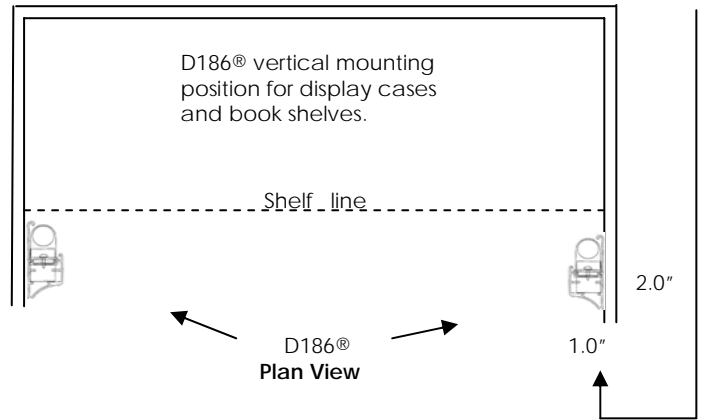

Job Name:
Job Nbr:
Tag:
Distributor:
Electrician
Engineer:
Interior Design:
Architect:
note: site measurements required

Specifications:

D186® - 14	14w	24" oal
D186® - 21	21w	36" oal
D186® - 28	28w	48" oal
D186® - 35	35w	60" oal

Lamps extra, please specify:

2700K,
3000K
4100K

Power feed:

left
right

D186® - ____ tandem ____ oal

Note:
Any Changes or modifications to mmj lighting 96 ltd lighting fixtures, must be done in the mmj lighting 96 ltd factory. Any modifications or changes done in the field will void all warranties and approvals.



D186 LVT5 shop drawing, revised 1 03 04 c us