


project specification

fixture type ET150 Electronic transformer with housing, primary breaker and overload protection

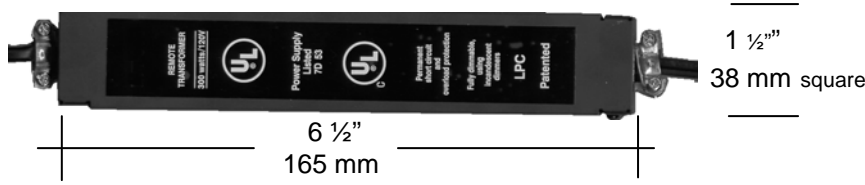

Note: primary and secondary connections can be done in the appropriate end of the transformer enclosure.

Job Name:  
 Job Nbr:  
 Tag:  
 Distributor:  
 Electrician:  
 Engineer:  
 Interior Design:  
 Architect:  
 note: site measurements required

Note:  
 Any Changes or modifications to mmj lighting 96 ltd lighting fixtures, must be done in the mmj lighting 96 ltd factory. Any modifications or changes done in the field will void all warranties and approvals.

### Specifications:

ET15024-150w capacity, 24v secondary, 120v primary.  
 ET15012-150w capacity, 12v secondary, 120v primary.


Note:  
 Housing includes wiring enclosure for 120v and 24v.  
 Dimensions as noted above.  
 Fully dimmable using incandescent dimmers  
 C-UL and UL Approved.[ power supply listed 7D 53]

**Note:** This transformer is to be installed with mmj lighting 96 ltd lighting products as a component completing the C-US approval.

**ELECTRICAL INSTALLATION INSTRUCTIONS SUPPLIED BY: MMJ LIGHTING 96 LTD , MUST BE FOLLOWED. FAILURE TO DO SO WILL VOID ANY APPROVALS.**


### Output Voltage vs. Load at 120V

Top line -24V version Bottom line -12V version

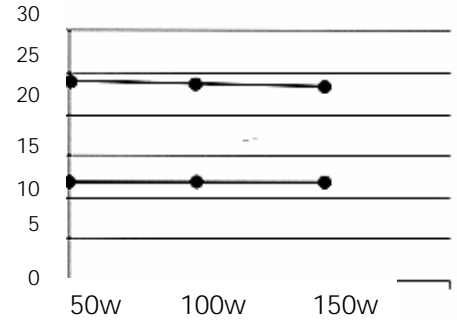

### Output vs. Input at Max. Load



Top line -24V version Bottom line -12V version

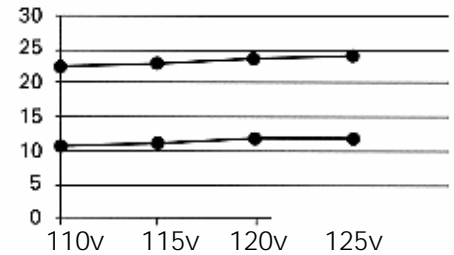

### Protection

Auto-reset electronic short circuit and overload protection. Auto-Reset thermal cut-off @ 125C. Fuse on primary.

### Wiring Diagram

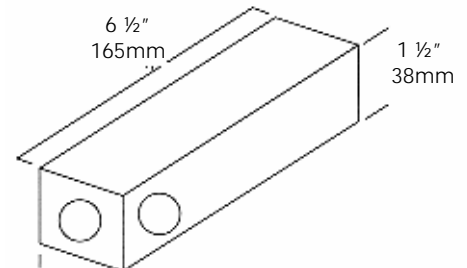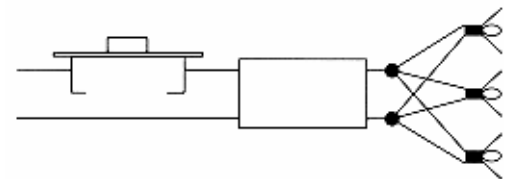

Shop drawing eth150 12 or 24v, 1.20.04 c