


project specification D187®-3 ___ L/P' ___ " o.c. L ___ - ___ W / P-Linear foot **PATENT PENDING**


fixture type

Job Name:
 Job Nbr:
 Tag:
 Distributor:
 Electrician
 Engineer:
 Interior Design:
 Architect:
 note: site measurements required


Note:
 Any Changes or modifications to mmj lighting 96 ltd lighting fixtures, must be done in the mmj lighting 96 ltd factory. Any modifications or changes done in the field will void all warranties and approvals.

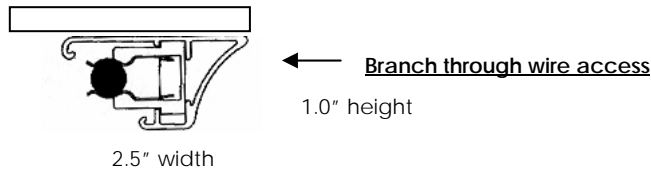

D187® under shelf mounting position
 The D187® can be used to support glass or wooden shelves,



D187® under cabinet application
 Note: valance not required

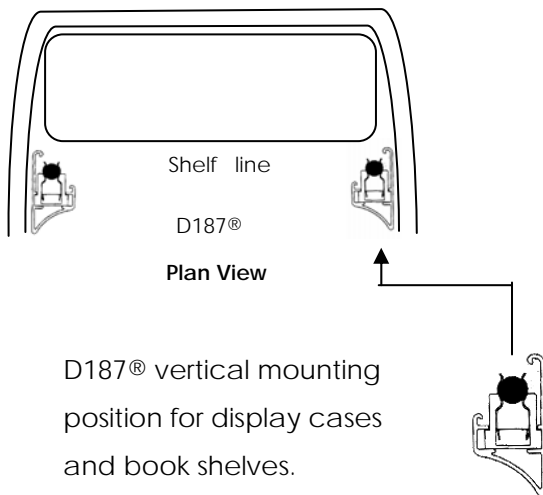

D187 LVMF shop drawing revised 1.20.04 

Specifications:

- D187® - 3" o.c. _____ oal
- D187® - 4" o.c. _____ oal
- D187® - 6" o.c. _____ oal

Lamps included, specify wattage and voltage:

- L176 3w24v
- L177Z 5w24v
- L178 10w24v
- L179 5w12v
- L180 10w12v

Electronic transformer: refer to binder section 7

- ET 7512 - 75w12v
- ET 7524 - 75w24v
- ET15012 - 150w12v
- ET15024 - 150w24v
- ET30012 - 300w12v
- ET30024 - 300w24v

Magnetic transformers - refer to binder section 7

Power feed, specify:

- left
- right

Integral electronic ballast:

Type 1 outdoor, minimum operating temperature -20 deg F, 30 deg C, maximum case temperature 158 deg F, 70 deg C, Ballast warranty 5 years from date of purchase.
BALLAST WILL BE REPLACED AT A PRORATED VALUE DURING TIME OF WARRANTY PERIOD.