



project specification

fixture type D193B-MR Bendable, 6" one lamp module

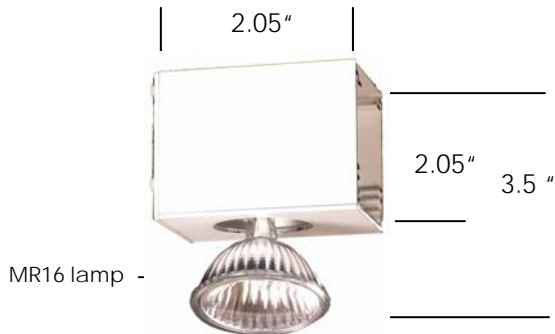

MR16 lamp -

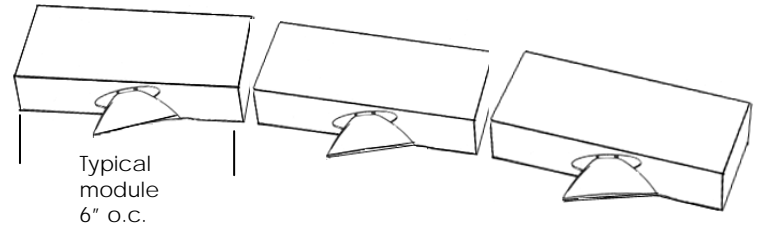

Typical module  
6" o.c.

Note: lamps swivel up to 40 deg [ 20deg from centre line ]

Job Name:  
Job Nbr:  
Tag:  
Distributor:  
Electrician:  
Engineer:  
Interior Design:  
Architect:  
note: site measurements required

Note:  
Any Changes or modifications to mmj lighting 96 ltd lighting fixtures, must be done in the mmj lighting 96 ltd factory. Any modifications or changes done in the field will void all warranties and approvals.

## Specifications:

- housing and cover extruded aluminum: dimensions 2" x 2".
- socket type: halogen 5.3 bi-pin base.
- lamp type: MR16 axial filament in dichroic reflector 12v MR 11, MR16.  
20W, 35w, 50w 65w misc\_\_\_\_\_
- beam: 8deg, 10deg, 20deg, 25deg 40deg
- lens holder D193MR-L black, chrome, stainless steel, gold
- colour lens D193MR-GL\_\_\_\_\_ specify colour.
- MR bendable D193B - MR - \_\_\_\_lamp\_\_\_\_" overall length.
- lamp spacing: 6" o.c., 12" o.c., custom spacing \_\_\_\_\_.
- Available in: 6" modules, integral at 50w maximum per module. 12" modules: D193B-MR 2.125" square, integral et 300w max,
- finishes: white, black, anodized\_\_\_\_\_ advise finish.
- transformer: integral \_\_\_\_\_w \_\_\_\_\_v electronic transformer. remote \_\_\_\_\_w \_\_\_\_\_v electronic transformer.
- MR row mounting use: D193-F, flex joiner up to 15a at 120v

D193B-MR shop drawing 1.20.04

