

Project specification: D625 4 L / P' - 3 " o.c. - L179 5 w / P-LP 20w/ P' plus ___ x MR11 - 20w each

fixture type

Job Name:
 Job Nbr:
 Tag:
 Distributor:
 Electrician
 Engineer:
 Interior Design:
 Architect:

note: site measurements required

Note:
 Any Changes or modifications to mmj lighting 96 ltd lighting fixtures, must be done in the mmj lighting 96 ltd factory.
 Any modifications or changes done in the field will void all warranties and approvals.



Lighting specifications:

A: Socket height - 1" [25mm] , Socket width - 1" [25mm] .
 B: A182 power feed - capacity 2 # 12 wires / 67 strand cable


Lamp specifications:

Incandescent clear :

Lamp nbr	type	watts ea.	volts ea.	amps	lumens	rated hours
L179	festoon	5w	12v	0.416	37	10,000

Accessories:

D628a MR11 or MR16 rotatable lamp holder will accept 20w 12v lamp ONLY
 D121ec - End cap - included by mmj 96 with each run required.
 A181 - Two-sided Tape.

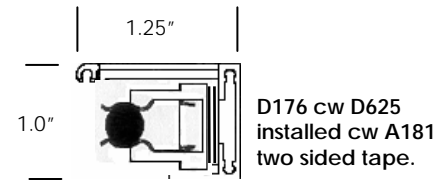

Extrusions and Angle brackets see section 10

D121 Extrusion

Transformers - see binder section 7

MAXIMUM LINEAR RUN:

140w 11.7a @ 12v

magnetic - TRF _____, _____v secondary
 electronic - ET _____, _____v secondary
 electronic housing - ETH _____

D625 c-w D628A, D176 shop drawing 6.30.04

