


shop drawing

project specification


fixture type

D633U indirect LVT5 up light

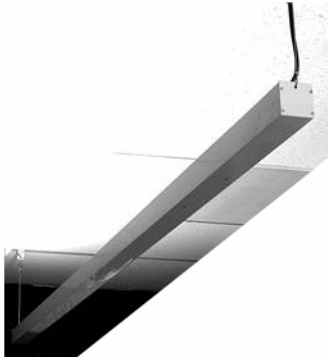

Top open for up lighting,
shown with LVT5 lamp,
length to suit

D633U indirect suspension
Over all length as noted below

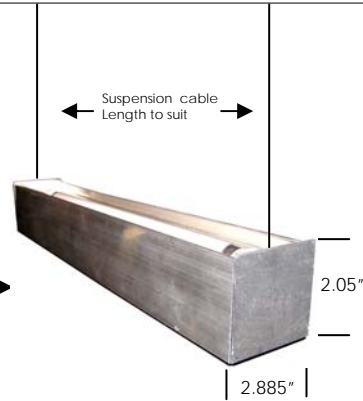

Job Name:
Job Nbr:
Tag:
Distributor:
Electrician
Engineer:
Interior Design:
Architect:
note: site measurements required

Specifications:

| | | |
|------------|---------------------------------------|----------|
| extrusion: | D633 U_____ " overall length. | INDIRECT |
| | D633 U tandem _____ " overall length. | INDIRECT |
| | D633 D_____ " overall length. | DIRECT |
| | D633 D tandem _____ " overall length. | DIRECT |

lamp type and lamp lengths:

LVT5
 ___x 14w[24"], ___x 21w,[36"] ___x 28w,[48"] ___x 35w.[60"]
 LVT2
 ___x 8w[12.5"], ___x 11w,[16.5"] ___x 13w[20.5"].

Colour temperature:

3000, 3500, 4100.

Available finishes:

white, black, anodized specify finish_____.

ballast:

integral: eb_____ x _____.
remote: eb_____ x _____.

Type 1 outdoor, minimum operating temperature -20 deg F [-30 deg C]
Maximum case temperature 158 deg F [70 deg C]

Ballast warranty 5 years from date of purchase.

BALLAST WILL BE REPLACED AT A PRORATED VALUE DURING TIME OF WARRANTY PERIOD

power feed:

left, right.

suspension:

_____ over all length.
advise ceiling type_____.

canopy: x_____ only.

finish:

white, black, anodized specify finish_____.

Note:

Any Changes or modifications to mmj lighting 96 ltd lighting fixtures, must be done in the mmj lighting 96 ltd factory. Any modifications or changes done in the field will void all warranties and approvals.

D633 U indirect. 06.14.07,

