


shop drawing

project specification
fixture type D193 WP LVT5 LVT5 HO and LVT8 specifications as listed below

Job Name:
 Job Nbr:
 Tag:
 Distributor:
 Electrician
 Engineer:
 Interior Design:
 Architect:
 note: site measurements required

Note:
 Any Changes or modifications to mmj lighting 96 ltd lighting fixtures, must be done in the mmj lighting 96 ltd factory. Any modifications or changes done in the field will void all warranties and approvals.

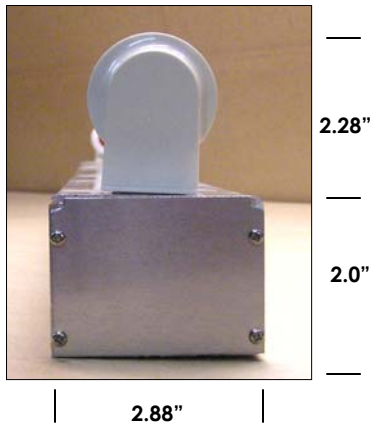

D193WP end view



D193WP end view complete with weatherproof lens

D193WP shop drawing 3.27.06



Specifications: EXTRUDED ALUMINUM Housing and Cover

Sockets: VS Moisture and Dust resistant.

Ballast: 120v, 277v 50/60Hz Type1 Outdoors.

Minimum operating temperature: -30 deg C

Row mounting [included] up to 15amps@120v

Accessory: D193WP-IJU internal joiner sleeve.

LVT5

- D193WP-14 1 x 14w
- D193WP-21 1 x 21w
- D193WP-28 1 x 28w
- D193WP-35 1 x 35w

LVT5 HO

- D193WP-24 1 x 24w 24" OAL
- D193WP-39 1 x 39w 36" OAL
- D193WP-54 1 x 54w 48" OAL
- D193WP-80 1 x 80w 60" OAL

Note: For LVT5 Tandem specify: D193WP-T-2 x ___w

Note: For LVT5 HO Tandem specify: D193WP-HO-T-2 x ___w

LVT8

- D193WP- 17 1 x 17w
- D193WP- 25 1 x 25w
- D193WP- 32 1 x 32w
- D193WP- 40 1 x 40w

Accessories LVT5, LVT5 HO and LVT8:

- D193WP-IJU weatherproof internal joiner and gasket.
- D193WP-EC weatherproof end caps.
- D193WP-PF weatherproof power feed
 specify: left feed, right feed,
 side feed: left side, right side,
 bottom feed: left side, right side.

Weatherproof lamp cover:

LEXAN Weatherproof lamp cover fastened to removable cover **Not illustrated**

- D193WP-CVR** weatherproof cover with gasket for exterior applications

