


# shop drawing

project specification Specify:  D118-\_\_\_w, cw D625 \_\_\_"o.c., L\_\_\_, \_\_\_w per lamp \_\_\_ overall length.

fixture type **D118 extrusion LVT5 or LVT5 HO** cw D625 LV mini flex multiple light source for coves.

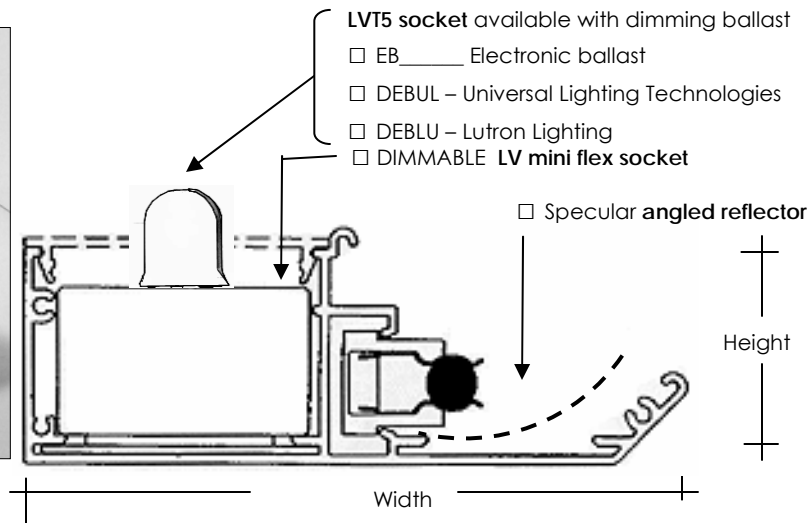

Job Name:  
 Job Nbr:  
 Tag:  
 Distributor:  
 Electrician  
 Engineer:  
 Interior Design:  
 Architect:  
 note: site measurements required

Note:  
 Any Changes or modifications to mmj lighting 96 ltd lighting fixtures, must be done in the mmj lighting 96 ltd factory. Any modifications or changes done in the field will void all warranties and approvals.



D118-2-54w T5 cw D625 LV mini flex shop drawing 5.15..06

### Specifications:

Overall width: 5 3/4"  
 Overall Height: 3 3/4"  
 Overall length: TBA

### LVT5:

LVT5 and LVT5 High Output Socket, adjustable to allow precise optical lighting control for indirect and direct applications. Specular reflector [ total reflection 86% ], **row mounting to 15a.**

**One lamp LVT5:**  14w - 23",  21w - 36",  28w - 48",  35w - 60"

**One lamp LVT5HO:**  24w - 23",  39w - 36",  54w - 48",  80w - 60"

### Light output initial lumens:

14w 1350,  21w 2100,  28w 2900,  35w 3650.  
 24w 2000,  39w 3500,  54w 5000,  80w 7000.

**Tandem lamp single ballast available**, for fixture to fixture seamless lighting. **CONSULT FACTORY**

### Accessories:

D118-IJ internal joiner.  
 D118-FIJ flexible internal joiner for curved applications.

**Reflector:** specular

**Socket:** Twist and lock with G5 base. 75w 600v - IP20

**Dimensions:** As noted above

**Housing:** Extruded aluminum cw snap on cover for ease of installation, wiring and ballast access.

**Ballast:** Integral electronic - Class P [thermal]  
 Sound rating: A

**Operating voltage:**  120v,  277v,  347v.

**Over current protection:** fused internally

**Minimum operating temp:** -20 deg F

**Maximum case temp:** 158 deg F

### LVMF:

LV mini flex dimmable xenon light source

### BINDER SECTION 5

**Lamp spacing:**  2.4"o.c.,  3.0"o.c.,  4.0"o.c.,  6.0"o.c.

**Lamp wattage:**  L177 - 5w24v,  L178 - 10w24v

150 ferrier street, unit 2, markham, ontario L3R 3K3  
 T 905 479 0788 F 905 479 7117 E sales@mmjlighting96.com

www.mmjlighting96.com

**mmj**  
 lighting 96 ltd